

Mobile Chippers

GS102GH

A compact chipper that offers an easy operability and a blower forced shooter



11.5

Max.
diameter
11.5
cm

Max.
capacity

2.0 m³/h

Max.
output

8.6 HP

Fuel

2.4 L/h

Weight

290 kg

Standard
Screen

30 mm

Basic performances

Maximum chipping diameter 11.5cm

Wood



Bamboo



The chips can be used for a wide range of applications such as soil conditioner, compost, mulching, etc.

Safety Design

Emergency stop button



When driving backwards, a slight pressure on the brake lever will automatically stop the machine to prevent accidents.

Compression prevention



When driving backwards, a slight pressure on the brake lever will automatically stop the machine to prevent accidents.

Produce very fine chips with **GS101GHB**

Includes :

Shredder knife set

Flow controller

5 or 8 mm screen

Wood 5mm screen



Bamboo 5mm screen



Fine chips can be used for bedding and then reused as compost after fermentation with animal dung.




Bedding



Compost

Options for chip size adjustment

5•8•10•15•20mm screens

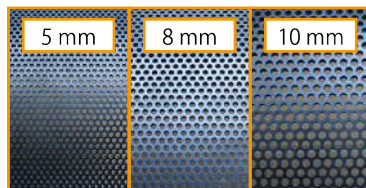

It is possible to adjust and equalize the chip size by simply changing screens. ※GS101GHB is equipped with either 5 or 8 mm screen as a standard.

Different chip sizes



By changing the size of the screen you can make finer and more uniform chips.

Major Specifications

	Item	Description		Item	Description
Overall	Product / Model	Wood chipper/GS102GH	Chipping	Blades	Chipper knife 2 pcs / Counter knife 1 pc Shredder knife 8pcs (option)
	L x W x H(mm)	1430×650×1350 mm (main body) 1760×650×1350 mm (with shooter)		Hopper W x H	465×350 mm
	Weight	290 kg		Driving system	Belt clutch / V belt
	Max. chipping dia	115 mm (soft wood)		Feeding system	Hydraulically driven feed roller type with automatic No-stress control
	Max. capacity	2.0 m ³ /h (standard 30 mm screen)	Discharge	Discharge system	Blower forced shooter
Power	Engine	Honda GX270 gasoline engine		Discharge height	1350 mm
	Max. output	8.6 HP / 6.3 kw		Discharge angle	Variable
	Fuel	Unleaded gasoline	Driving	Steering type	Side clutch
	Fuel tank	5.3 L		Driving type	Self-propelled rubber crawler type
	Fuel consumption	2.4 L / h		Speed	Forward 1 : 1.3 km/h Forward 2 : 2.7 km/h Rearward : 1.6 km/h
	Starting system	Recoil starter			

* Specifications are subject to change without prior notice.



ohashi
ECOLOGICAL TECHNOLOGY

ohashi inc.

401 SAKIMURA CHIYODA KANZAKI
SAGA JAPAN 842-0065
TEL +81-952-44-3135
FAX +81-952-44-3137
E-MAIL global@ohashi-inc.com
WEB www.ohashi-inc.com